

# 日揚螺絲 產品型錄


## 軸用扣環 ISTW

碳鋼(黑色)

產品編號(碳鋼黑色) : 5147IS No.-1




HRC 44 ~ 52

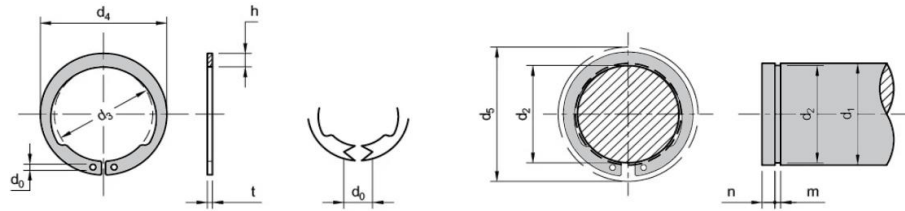

No.	扣環								適用軸 (參考)						
	d3		d4	t		h	d0	Gen. Tol.	d5	d1	d2		m		n
	Basic	容許公差		Basic	容許公差						Basic	容許公差	Basic	容許公差	
6	5.6		8.0	0.50		1.2	2.2		8.9	6	5.7	-0.04	0.60		
7	6.5	+0.10	9.3	0.60		1.4	2.4	± 0.2	10.3	7	6.7	0	0.70	+0.10	
8	7.4	-0.20	10.6	0.70		1.6	3.0		11.7	8	7.6	-0.06	0.80	0	
9	8.4		12.0	0.80		1.8	3.4		13.1	9	8.6		0.95		
10	9.3	± 0.15	13.3			2.0			14.5	10	9.6	-0.09			
11	10.2		14.4		± 0.04	2.1			16.0	11	10.5				
12	11.1		15.5			2.2			17.2	12	11.5				
13	12.0		16.6	1.00		2.3	1.2		18.4	13	12.4		1.15		
14	12.9		17.5			2.3		± 0.3	19.4	14	13.4	0			
15	13.8	± 0.18	18.6			2.4			20.6	15	14.3	-0.11			
16	14.7		19.7			2.5			21.8	16	15.2				
17	15.7		20.9			2.6			23.0	17	16.2				
18	16.5		21.9			2.7			24.2	18	17.0				1.5
19	17.5		23.1			2.8			25.4	19	18.0				
20	18.5		24.3			2.9			27.0	20	19.0				
21	19.5		25.5	1.20		3.0	1.5		28.0	21	20.0		1.35		
22	20.5		26.5			3.0		± 0.4	29.0	22	21.0				
24	22.2		28.6			3.2			31.5	24	22.9	0		+0.14	
25	23.2	± 0.20	29.8		± 0.05	3.3			33.0	25	23.9	-0.21		0	
26	24.2		31.0			3.4			34.0	26	24.9				
28	25.9		33.1			3.6			36.5	28	26.6				
29	26.9		34.1			3.6			37.5	29	27.6				
30	27.9		35.3	1.50		3.7	1.8		38.5	30	28.6		1.65		
32	29.6		37.4			3.9			41.0	32	30.3				
34	31.5		39.7			4.1			43.5	34	32.3				
35	32.2	± 0.25	40.6			4.2			45.0	35	33.0				
36	33.2		41.6			4.2			46.0	36	34.0				
38	35.2		44.0			4.4			48.0	38	38.0	0			
40	37.0		46.2	1.75	± 0.06	4.6	2.0		51.0	40	38.0	-0.25		1.90	2.0
42	38.5	± 0.40	48.1			4.8		± 0.5	54.0	42	39.5				
45	41.5		51.3			4.9			57.0	45	42.5				
48	44.5		55.1	2.00		5.3			61.0	48	45.5				

# 日揚螺絲 產品型錄

## 軸用扣環 ISTW

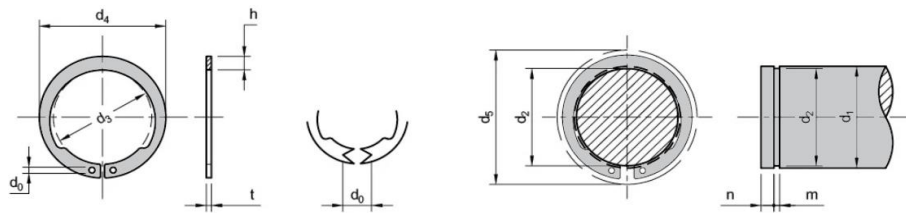

No.	扣環							適用軸 (參考)							
	d3		d4	t		h	d0	Gen. Tol.	d5	d1	d2		m		n
	Basic	容許公差		Basic	容許公差						Basic	容許公差	Basic	容許公差	
50	45.8	± 0.40	56.8	2.00	± 0.06	5.5	2.5	± 0.5	63.0	50	47.0	0	2.20	+0.14 0	2.0
52	47.8	± 0.45	59.0			5.6			65.0	52	49.0	-0.25			
55	50.8		62.6			5.9			69.0	55	52.0				
56	51.8		63.8			6.0			70.0	56	53.0				
58	53.8		66.0			6.1			72.0	58	55.0				
60	55.8		68.4			6.3			75.0	60	57.0				
62	57.8		70.8			6.5			77.0	62	59.0				
63	58.8		72.0			6.6			78.0	63	60.0				
65	60.8		± 0.45	74.4	2.50	± 0.06	6.8	3.0	± 0.7	81.0	65	62.0	0	2.70	+0.14 0
68	63.5	77.5		7.0			84.0			68	65.0	-0.3			
70	65.5	79.9		7.2			87.0			70	67.0				
72	67.5	82.1		7.3			89.0			72	69.0				
75	70.5	85.7		7.6			92.0			75	72.0				
78	73.5	89.3		7.9			96.0			78	75.0				
80	74.5	90.5		8.0			98.0			80	76.5				
82	76.5	92.9		8.2			101.0			82	78.5				
85	79.5	± 0.55	96.5	3.00	± 0.07	8.5	3.6	± 0.7	104.0	85	81.5	0 -0.35	3.20	+0.18 0	3.0
88	82.5		99.9			8.7			108.0	88	84.5				
90	84.5		102.3			8.9			110.0	90	86.5				
95	89.5		108.1			9.3			116.0	95	91.5				
100	94.5		113.9			9.7			122.0	100	96.5				