


日揚螺絲 產品型錄

內齒 / 外齒華司

(JIS B 1255)

碳鋼 HRC40-50
不銹鋼

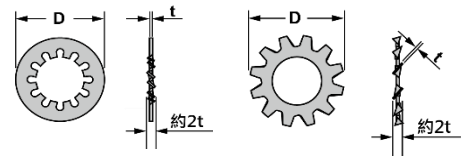

編號(內齒,鐵鍍鋅) : 3172 No.-2

編號(內齒,鐵鍍鋅) : 3272 No.-2 (●色標註)

編號(內齒,不銹鋼) : 4172 No.-1

編號(內齒,不銹鋼) : 4272 No.-1 (●色標註)

編號(外齒,鐵鍍鋅) : 3145 No.-2

編號(外齒,鐵鍍鋅) : 3245 No.-2 (●色標註)

編號(外齒,不銹鋼) : 4145 No.-1

編號(外齒,不銹鋼) : 4245 No.-1 (●色標註)

No.	適用螺絲		d		D		t		齒數		
	mm	Inch	基準值	容許值	基準值	容許值	基準值	容許值	內齒	外齒	
2M	2.0		2.2	+0.2 0	4.8	0 -0.3	0.30	±0.025	7	8	
2.3M	2.3	-	2.5		5.3		0.30		7	8	
2.5M	2.5	-	2.7		5.7		0.30		7	8	
3M	3.0	-	3.2		6.5	0 -0.4	0.45	±0.035	7	8	
3.5M	3.5	-	3.7		7.5		0.45		8	8	
4M	4.0	-	4.3		8.5		0.45		8	8	
4.5M	4.5	-	4.8		9.5		0.50		8	8	
5M	5.0	-	5.3		10.0	±0.040	0.60	±0.040	8	10	
6M	6.0	-	6.4		11.0		0.60		9	12	
7M	7.0	-	7.4		+0.3 0	13.0	0 -0.5	0.80	±0.050	10	-
8M	8.0	-	8.4	15.0		0.80		9		12	
030	-	3/8	9.8	17.5		0.90		9		12	
10M	10.0	-	10.5	18.0	0.90	9		12			
035	-	7/16	11.4	19.5	0 -0.6	0.90		±0.055		10	12
12M	12.0	-	12.5	21.0		1.00	10		12		
040	-	1/2	13.0	22.5		1.00	10		12		
14M	14.0	-	14.5	23.0		1.00	10		14		
16M	16.0	5/8	16.5	±0.065	26.0	1.20	±0.065	12	14		
18M	18.0	-	19.0		29.0	1.20		12	14		
060	-	3/4	19.6		32.0	1.20		12	14		
20M	20.0	-	21.0	+0.5 0	32.0	±0.070	1.40	±0.070	12	14	
22M	22.0	7/8	23.0		35.0		1.40		14	16	
24M	24.0	-	25.0		-0.8	38.0	±0.080	1.60	±0.080	14	16
100	-	1"	26.0			41.0		1.60		14	16

No.	d		D		t		齒數	Design Variation
	基準值	容許值	基準值	容許值	基準值	容許值		
AW1811	1.9	+0.20 0	4.5	±0.10	0.25	±0.025	6	
AW6301	6.6	±0.15	10.2	±0.20	0.50	±0.030	9	
AW9101	9.1	+0.30 0	16.5	0 -0.40	0.90	±0.050	9	
AW9102	9.1		14.8	0 -0.50	0.50	±0.030	16	
AW9103	9.4	±0.15	12.9	±0.15	0.50	±0.030	16	
AW9501	9.9	+0.30 -0.20	17.3	+0.2 -0.50	0.90	±0.050	10	
AW12001	12.2	+0.20 -0.10	15.2	+0.50 0	0.50	±0.030	12	
AW13001	13.1	±0.20	16.3	±0.25	0.60	±0.040	20	Fig 1.
AW28601	29.1	+1.0 0	46.5	0 -0.80	1.60	±0.070	16	